


Section 8 Town 6 Range 5

May 6 1931

I commenced a Survey of Section 8, T. 6, R. 5
for Helmer Holmes, Jesse Rollison
Lawry Benham
Jack Jackson Notified

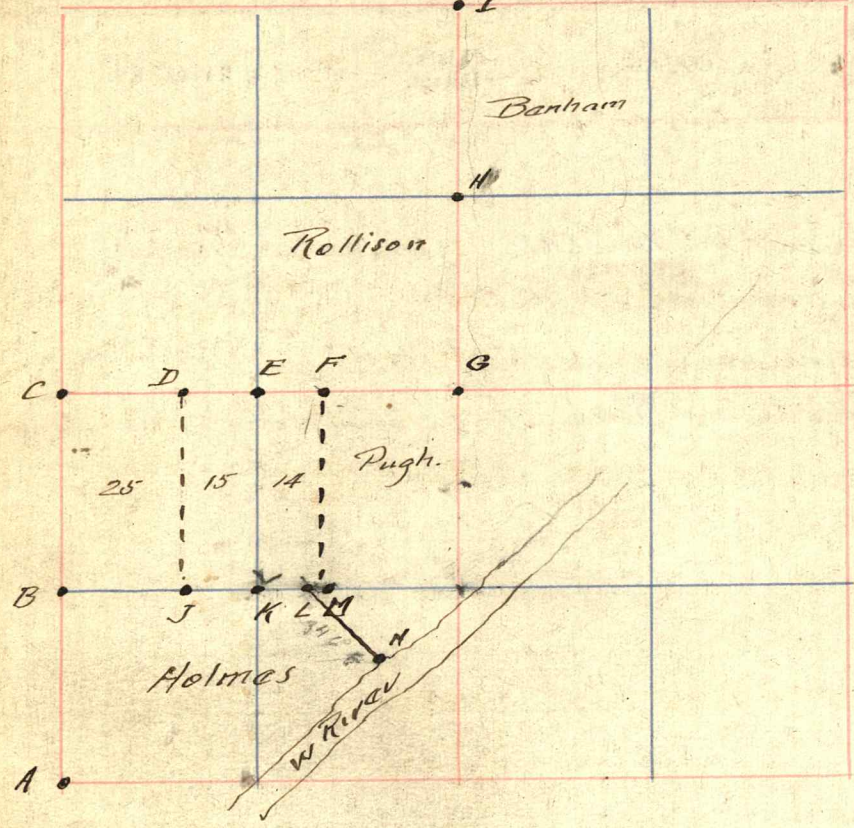

Frank Inman
Dou Foster } C. B.

Henry Schlot
Surveyor Greene County.

Var.

Course.	Point of Beginning.	Feet. Chains. Distance.	Corrected Bearings.
North	SW	2624.7	To the W 1/4. Both Stones in & Not checked. Set W 1/4 of SW. Iron fence post. 65' North of Old Stone (con)
East	W 1/4	2655.8	to Cor 1/4 Stones in, Stone at N 1/4 SW. found also 1 Oak stem. Stone had been knocked out of place. Set 2nd piece T.R.R. rail
South	N 1/4	2633.70	to Cor 1/4 Found Both Stones Clogstons wit at N 1/4 C to D = 829.94' B to J = 829.94' B to K = 1327.9' E to F = 464.7' K-M = 464.7' B to L = 1632.84'

CORNER ESTABLISHED.	Monument.	Device.	WITNESS POINTS OR BEARING TREES.	Mark or Dia. in Inches.	COURSE.	Feet. Links. Distant.	REMARKS.
New Wit. SW	Old Stone	Syc		30	S 53° 15' W	49.00	
W 1/4 SW	Iron fence Post		Old Stone	Can.	South	0.65	
829.94 E. of W 1/4			Wal.	24"	S 41° W	14.30	
			Cor. in ditch		Set Iron axle 1 1/4" dia 4' Long. 10 ft south Wit by		
	2 ft of		Nat Oak	40"	S 21° 15' W	8.27	
N 1/4 SW	R.R. Rail		Con. Cor Post to	10"	N 30° 30' W	8.50	
464.7 ft E of above	Stone	+					
N 1/4	old Stone	+	Clogstons Wit Standing				
E 1/4 NW	5		Maple	14"	S 61° E	84.35	
E 1/4 NW	Stake		Con. Cor Post	10"	S 67° W	17.80	
829.94 E of W 1/4 SW	Iron axle 1 1/4" dia						
Cor 1/4 SW	Iron fence Post						
1632.84 ft E of W 1/4 SW	Iron fence post						
464.7 ft E. of Cor 1/4 SW	Iron Rod 1 1/4 dia						
Point N =	S 46° E of L ₁ on River Bank						dist. Not chained - Iron fence post.

See

Sec 2-T-6 Dec 3, 31 When building Gravel Road on hwy, I saw
N 1/4 Pasture 16 Oak Stumps here. Drove 3/4" x 20" Iron Bolt with square head here in Gravel
N 1/4 NE. Made New Wit SW cor N 1/4 NE to Cor. Culvert to NE - 15.80 ft.
SW " S 1/4 NE to " " to SE - 16.30 ft